

Technical Specification

Model	SE-DL338A-85-20W (Surface)
Watts	20W
Input Voltage	AC 100~277V
Power Factor	>0.95
Beam Angle	36°
CCT Selection Dip Switch	3CCT: 3000K + 4000K + 5000K
CRI	Ra>90
Lumens Output	1700-1900lm
Size	Ø85*206mm
Dimming	Triac
IP Grade	IP 20
Housing Colour	White / Black




Installation Procedure

WARNING

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



1-1. Surface mounted installation (65mm/85mm/100mm)

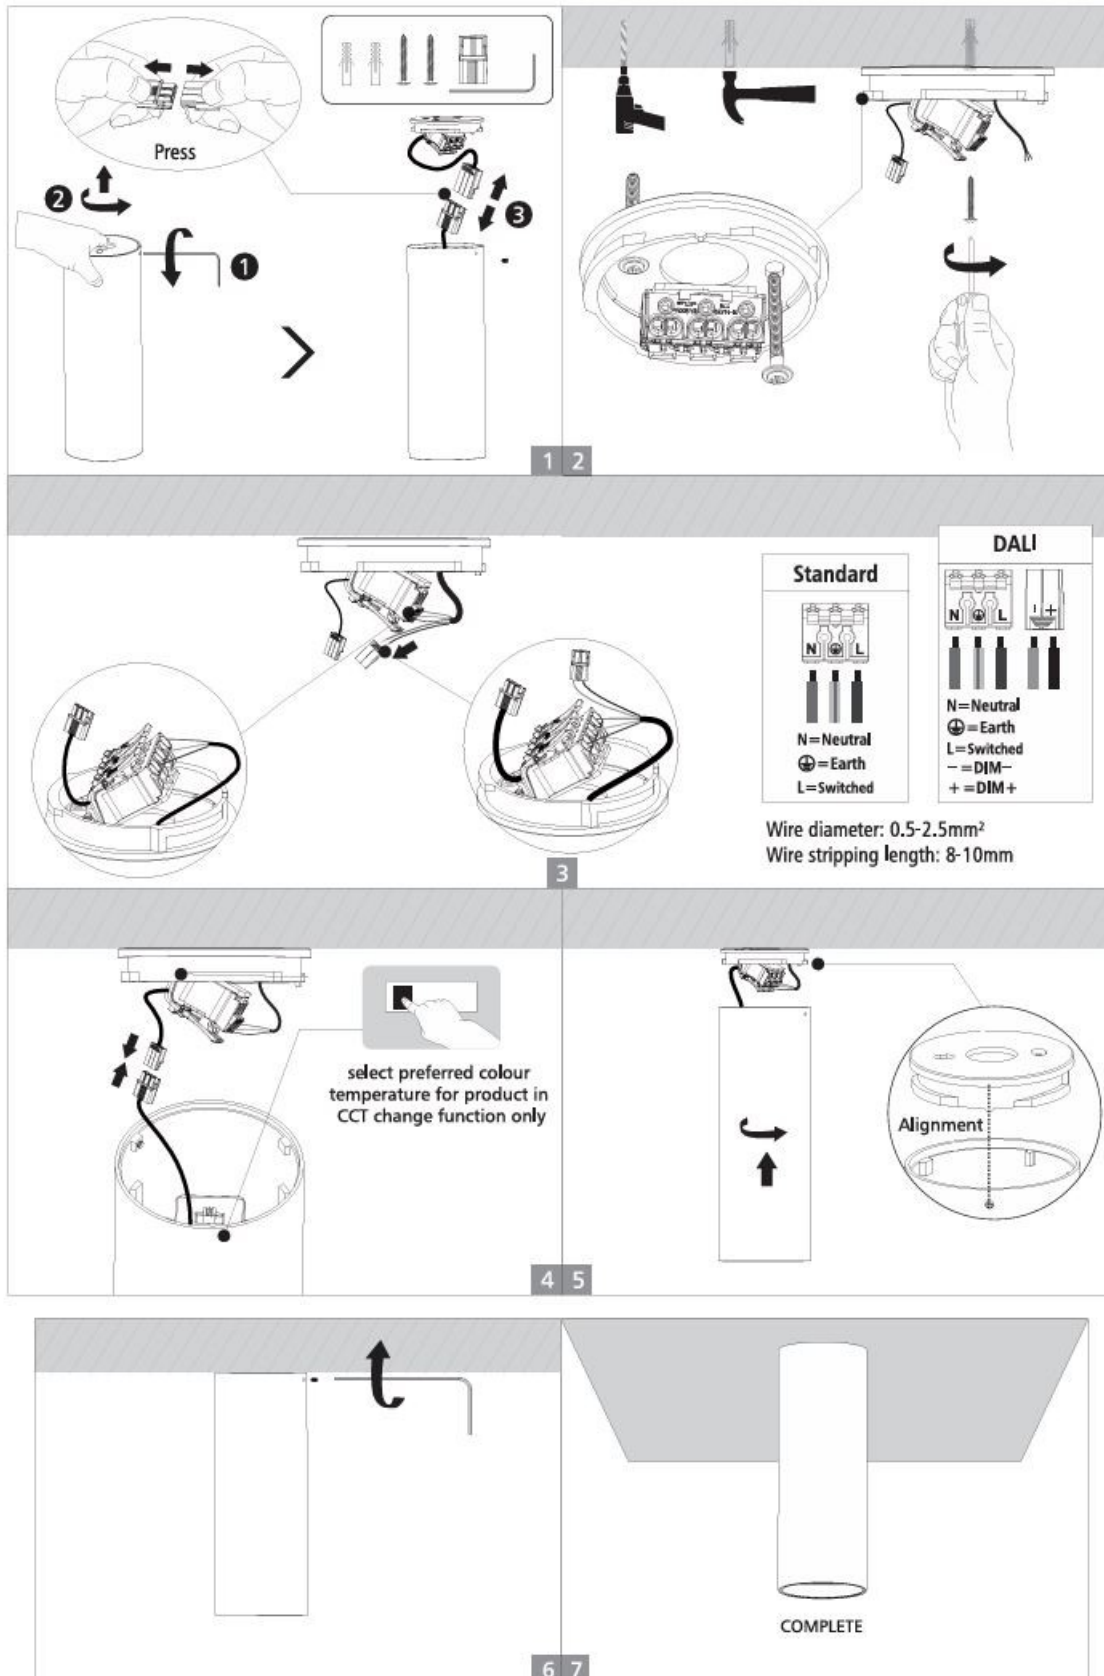

DIY Design

PD338B-55/65/85/100

TL338-55/65/85/100

PD338A-55/65/85/100

DL338B-55/65/85/100

DL338A-55/65/85/100

DL338-55/65/85/100

ACC-PD338B-55/65/85/100

ACC-TL338-55/65/85/100

ACC-PD338A-55/65/85/100

ACC-DL338B-55/65/85/100

ACC-DL338A-65/85/100

ACC-DL338-55/65/85/100

ACC-DL338A-55

Reflector & White/Black/Golden trim 24°/36°/60°



Honeycomb & White/Black/Golden trim
Will affect lighting angle and have 40% lumen decrease

